

[MS-MSBD]: Media Stream Broadcast Distribution (MSBD) Protocol Specification

Intellectual Property Rights Notice for Protocol Documentation

- This protocol documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the protocols, and may distribute portions of it in your implementations of the protocols or your documentation as necessary to properly document the implementation. This permission also applies to any documents that are referenced in the protocol documentation.
- Microsoft does not claim any trade secret rights in this documentation.
- Microsoft has patents that may cover your implementations of the protocols. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. If you are interested in obtaining a patent license, please contact protocol@microsoft.com.
- The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

This protocol documentation is intended for use in conjunction with publicly available standard specifications, network programming art, and Microsoft Windows distributed systems concepts, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

A protocol specification does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them.

Revision Summary

Date	Revision History	Revision Class	Comments
10/22/2006	0.01		MCPP Milestone 1 Initial Availability
01/19/2007	1.0		MCPP Milestone 1
03/02/2007	1.1		Monthly release
04/03/2007	1.2		Monthly release

Date	Revision History	Revision Class	Comments
05/11/2007	1.3		Monthly release
06/01/2007	2.0	Major	Updated and revised the technical content.
07/03/2007	2.0.1	Editorial	Revised and edited the technical content.
07/20/2007	3.0	Major	Updated and revised the technical content.
08/10/2007	4.0	Major	Updated and revised the technical content.
09/28/2007	4.1	Minor	Updated the technical content.
10/23/2007	5.0	Major	Made revisions for maximum field.
11/30/2007	5.1	Minor	Updated the technical content.
01/25/2008	5.1.1	Editorial	Revised and edited the technical content.

Table of Contents

1	Introduction	5
1.1	Glossary	5
1.2	References	5
1.2.1	Normative References	5
1.2.2	Informative References.....	6
1.3	Protocol Overview (Synopsis).....	6
1.4	Relationship to Other Protocols.....	6
1.5	Prerequisites/Preconditions	6
1.6	Applicability Statement	6
1.7	Versioning and Capability Negotiation.....	6
1.8	Vendor-Extensible Fields	6
1.9	Standards Assignments.....	7
2	Messages	8
2.1	Transport	8
2.2	Message Syntax	8
2.2.1	MSBMSGBASE	8
2.2.2	MSB_MSG_RES_PING.....	9
2.2.3	MSB_MSG_REQ_PING	9
2.2.4	MSB_MSG_REQ_STREAMINFO	10
2.2.5	MSB_MSG_RES_STREAMINFO	10
2.2.6	MSB_MSG_IND_STREAMINFO.....	13
2.2.7	MSB_MSG_REQ_CONNECT	15
2.2.8	MSB_MSG_RES_CONNECT	16
2.2.9	MSB_MSG_IND_EOS	17
2.2.10	MSB_MSG_IND_PACKET	17
3	Protocol Details	19
3.1	Server Details.....	19
3.1.1	Abstract Data Model	19
3.1.2	Timers	19
3.1.3	Initialization.....	19
3.1.4	Higher-Layer Triggered Events.....	20
3.1.5	Message Processing Events and Sequencing Rules	20
3.1.5.1	Receiving an MSB_MSG_REQ_CONNECT Packet	20
3.1.5.2	Receiving an MSB_MSG_REQ_STREAMINFO Packet	20
3.1.5.3	Reaching the End of the Stream	20
3.1.6	Timer Events.....	20
3.1.7	Other Local Events	20
3.2	Client Details	20
3.2.1	Abstract Data Model	21
3.2.2	Timers	21
3.2.3	Initialization.....	21
3.2.4	Higher-Layer Triggered Events.....	21
3.2.5	Message Processing Events and Sequencing Rules	21
3.2.5.1	Receiving an MSB_MSG_REQ_PING Packet.....	21
3.2.5.2	Receiving an MSB_MSG_IND_STREAMINFO Packet.....	22
3.2.6	Timer Events.....	22
3.2.7	Other Local Events	22
4	Protocol Example.....	23
4.1	General MSBD Sequence	23
4.2	Server-Side Playlist Streaming by Using MSBD	24

5	Security	26
5.1	Security Considerations for Implementers	26
5.2	Index of Security Parameters	26
6	Appendix A: Windows Behavior	27
7	Index.....	28

1 Introduction

The Media Stream Broadcast Distribution (MSBD) Protocol is a Microsoft proprietary protocol that is used for transferring an audio-visual content stream from a server to a single client or multiple clients.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

Little-Endian

The following terms are specific to this document:

.nsc file: A Windows Media Station file that serves as an announcement of a media stream broadcast.

Advanced Systems Format (ASF): An extensible file format designed to store coordinated digital media data. It supports data delivery over a wide variety of networks and is also suitable for local playback.

Parity Packet: An **Advanced Systems Format (ASF)** packet that is only used for error correction purposes.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[ASF] Microsoft Corporation, "Advanced Systems Format Specification", December 2004, http://download.microsoft.com/download/7/9/0/790fecaa-f64a-4a5e-a430-0bccdab3f1b4/ASF_Specification.doc

If you have any trouble finding [ASF], please check [here](#).

[MS-DTYP] Microsoft Corporation, "[Windows Data Types](#)", January 2007.

[MS-ERREF] Microsoft Corporation, "[Windows Error Codes](#)", January 2007.

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)", March 2007.

[MS-MSB] Microsoft Corporation, "[Media Stream Broadcast \(MSB\) Protocol Specification](#)", January 2007.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>

1.2.2 Informative References

This protocol has no informative references.

1.3 Protocol Overview (Synopsis)

The Media Stream Broadcast Distribution (MSBD) Protocol is used for transferring a live stream of audio-visual content from a server to a single client or multiple clients. For example, the MSBD Protocol might be used when transmitting the digitized sound and images of a lecture from a computer that is encoding the lecture in real time to another computer that is running the appropriate streaming media server software, such as Windows Media Services version 4.1.

The MSBD Protocol can also be used for transmitting a live stream from one Windows Media Services server installation to another. Certain versions of Windows Media Player [<1>](#) also support the MSBD Protocol and can use it to monitor a live stream by connecting to a server running Windows Media Services, or directly to a real-time encoder.

1.4 Relationship to Other Protocols

MSBD packets are encapsulated in TCP. However, one MSBD packet type, [MSB MSG IND PACKET](#), can also be encapsulated in the User Datagram Protocol (UDP). The UDP encapsulation mode is only used for transmitting packets to an IPv4 multicast group. [<2>](#)

1.5 Prerequisites/Preconditions

The MSBD Protocol does not provide a mechanism for a client to discover the URL to the server. Therefore, it is a prerequisite that the client obtain a URL to the server before this protocol can be used.

1.6 Applicability Statement

The MSBD Protocol can be used to distribute **Advanced Systems Format (ASF)** packets over an IP-based network. The MSBD Protocol is designed for distribution of content between servers or from an encoder to a server. [<3>](#) The MSBD Protocol is not intended for use by an end-user application such as Windows Media Player except for troubleshooting.

The UDP encapsulation mode of this protocol might not be suitable for content that uses large ASF data packets. Large ASF data packets may cause the UDP packets to be fragmented into multiple IP datagrams, and fragmentation of IP datagrams might be undesirable. In such cases, it is recommended to use the TCP encapsulation mode instead.

1.7 Versioning and Capability Negotiation

The MSBD Protocol does not support negotiation of versioning or capabilities. However, server implementations of the MSBD Protocol are not required to support delivery of [MSB MSG IND PACKET](#) packets over UDP. If a client requests such delivery, and the server does not support it, the server sends an [MSB MSG RES CONNECT](#) packet to indicate that the operation failed.

1.8 Vendor-Extensible Fields

This protocol uses [HRESULT](#) values as defined in [\[MS-ERREF\]](#). Vendors can define their own **HRESULT** values, provided that they set the C bit (0x20000000) for each vendor-defined value, indicating that the value is a customer code.

1.9 Standards Assignments

The MSBD Protocol has no applicable standards assignments.

2 Messages

The following sections specify how Media Stream Broadcast Distribution (MSBD) Protocol messages are transported and MSBD Protocol message syntax.

2.1 Transport

[MSB_MSG_IND_PACKET](#) packets are encapsulated in UDP packets if IP multicasting is used to deliver those packets. Otherwise, the MSB_MSG_IND_PACKET packets are encapsulated in TCP. All other MSBD Protocol packets MUST be encapsulated in TCP. The UDP and TCP packets MUST be encapsulated in the IP version 4 (IPv4).

There is no officially assigned TCP port for the MSBD Protocol; however, MSBD servers often listen on TCP port 7007 for client requests.

2.2 Message Syntax

All 16-bit and 32-bit integer fields MUST be transmitted in **little-endian** byte order, unless otherwise specified.

All fields that are unsigned 16-bit integers have valid ranges from 0x0000 to 0xFFFF, inclusive, unless otherwise specified.

All fields that are unsigned 32-bit integers have valid ranges from 0x00000000 to 0x0000FFFF, inclusive, unless otherwise specified.

2.2.1 MSBMSGBASE

The MSBMSGBASE header defines the packet header.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	1	2	3	4	5	6	7	8	9	30	1
dwSignature																															
wVersion																wMessageId															
cbMessage																															
hr																															

dwSignature (4 bytes): An unsigned 32-bit integer that identifies the protocol as the MSBD Protocol. This value MUST be 0x2042534D, which is the little-endian representation of the ASCII character sequence "MSB[space]".

wVersion (2 bytes): An unsigned 16-bit integer that represents the version number of the MSBD Protocol. This value is currently 0x0106.

wMessageId (2 bytes): An unsigned 16-bit integer that designates the MSBD packet type. This value MUST be one of the following:


Value	Meaning
0x0001	Designates an MSB_MSG_REQ_PING packet.
0x0002	Designates an MSB_MSG_RES_PING packet.
0x0003	Designates an MSB_MSG_REQ_STREAMINFO packet.
0x0004	Designates an MSB_MSG_RES_STREAMINFO packet.
0x0005	Designates an MSB_MSG_IND_STREAMINFO packet.
0x0007	Designates an MSB_MSG_REQ_CONNECT packet.
0x0008	Designates an MSB_MSG_RES_CONNECT packet.
0x0009	Designates an MSB_MSG_IND_EOS packet.
0x000A	Designates an MSB_MSG_IND_PACKET packet.

cbMessage (4 bytes): An unsigned 32-bit integer that contains the byte length of the packet, including the header. The **cbMessage** field MUST be set to a value in the range 0x0010 to 0xFFFF, inclusive.

hr (4 bytes): An unsigned 32-bit integer field representing the status of an operation. The **hr** field MUST be set to an [HRESULT](#) code. For **HRESULT** codes, see [\[MS-ERREF\]](#) section 2.1.

2.2.2 MSB_MSG_RES_PING

The client MUST respond with the MSB_MSG_RES_PING packet to the [MSB_MSG_REQ_PING](#) packet that is sent by the server. This packet informs the server that the client is still active.

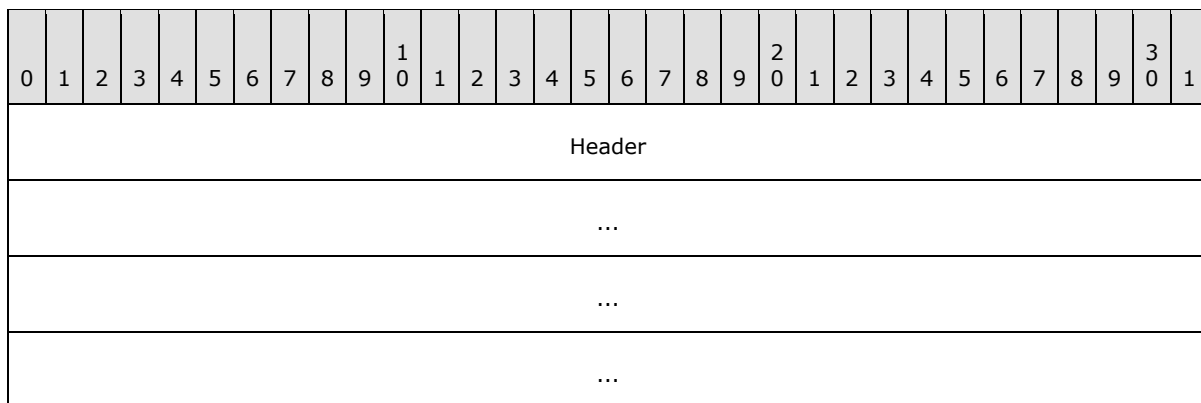

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0002.

2.2.3 MSB_MSG_REQ_PING

The server MAY send an MSB_MSG_REQ_PING packet to confirm that the client is still active. It is recommended that the server send this packet approximately every two minutes. If active, the client MUST respond with an [MSB_MSG_RES_PING](#) packet; otherwise, the server SHOULD end the session.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Header																															
...																															
...																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0001.

2.2.4 MSB_MSG_REQ_STREAMINFO

The client MAY send the MSB_MSG_REQ_STREAMINFO packet to request information about the media stream. This request is optional because the server always sends the stream information in an [MSB_MSG_IND_STREAMINFO](#) packet immediately after sending an [MSB_MSG_RES_CONNECT](#) packet. The MSB_MSG_REQ_STREAMINFO packet is deprecated and SHOULD NOT be sent by clients.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Header																															
...																															
...																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0003.

2.2.5 MSB_MSG_RES_STREAMINFO

The server MUST respond with an MSB_MSG_RES_STREAMINFO packet to a client [MSB_MSG_REQ_STREAMINFO](#) packet that requests media stream information. The structure and purpose of this packet are identical to those of the [MSB_MSG_IND_STREAMINFO](#) packet. The client requests media stream information from the server only if the server omits sending the MSB_MSG_IND_STREAMINFO packet immediately after the [MSB_MSG_RES_CONNECT](#) packet.

0	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	20	1	2	3	4	5	6	7	8	9	30	1
Header																															
...																															
...																															
...																															
wStreamId																cbPacketSize															
cTotalPackets																															
dwBitRate																															
msDuration																															
cbTitle																															
cbDescription																															
cbLink																															
cbHeader																															
bBinaryData (variable)																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0004.

wStreamId (2 bytes): An unsigned 16-bit integer that uniquely identifies the media stream that is currently being transmitted. The value of this field MUST be identical to the value of **wStreamId** that is used in the MSB_MSG_IND_STREAMINFO packet that the server transmitted for the current stream. If the server has not transmitted an MSB_MSG_IND_STREAMINFO packet for the current stream, the value of **wStreamId** MUST be chosen in accordance with the rules for choosing a **wStreamId** value for an MSB_MSG_IND_STREAMINFO packet. The value of the **wStreamId** field MUST be in the range 0x0000 to 0xFFFF, inclusive.

cbPacketSize (2 bytes): An unsigned 16-bit integer that specifies the maximum size, in bytes, of the payload in each [MSB_MSG_IND_PACKET](#) packet. The value of the **cbPacketSize** field MUST be in the range 0x0000 to 0xFFFF, inclusive.

cTotalPackets (4 bytes): An unsigned 32-bit integer that MUST be set to the total number of [MSB_MSG_IND_PACKET](#) packets that are needed to transmit the entire media stream—if this information is known. Otherwise, the field MUST be set to zero. The value of the **cTotalPackets** field MUST be in the range 0x00000000 to 0x0000FFFF, inclusive.

dwBitRate (4 bytes): An unsigned 32-bit integer that contains the bit rate, in bits per second, of the media stream that is measured. For an ASF stream, the value of the **dwBitRate** field corresponds to the value of the Maximum Bitrate field in the ASF File Properties Object. The value of the **dwBitRate** field MUST be in the range 0x00000000 to 0x0000FFFF, inclusive.

msDuration (4 bytes): An unsigned 32-bit integer that MUST be set to the duration, in milliseconds, of the media stream, if this information is known. Otherwise, this value MUST be set to -1 (FFFFFFFF hexadecimal). For an ASF stream, the value of the **msDuration** field corresponds to the value of the Play Duration field in the ASF File Properties Object. The value of the **msDuration** field MUST be in the range 0x00000000 to 0x0000FFFF, inclusive.

cbTitle (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream title. The stream title MUST be first in the **bBinaryData** field. The value of the **cbTitle** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbDescription (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream description. The stream description MUST follow the stream title in the **bBinaryData** field. The value of the **cbDescription** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbLink (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream link (an arbitrary moniker for the connection over which the media stream is to be transmitted). The stream link MUST follow the stream description in the **bBinaryData** field. The value of the **cbLink** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbHeader (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream header. The stream header MUST follow the stream link in the **bBinaryData** field. If the **szChannel** field of the [MSB_MSG_REQ_CONNECT](#) packet is set to NetShow, the stream is in the Advanced Systems Format (ASF), as specified in [\[ASF\]](#) section 2, and the stream header is an ASF header. In the case of an ASF Header, the value of the **cbHeader** field is the size of the entire ASF Header Object, as described in [\[ASF\]](#) section 3.1, plus 50 bytes (which represents the fixed initial portion of the ASF Data Object, as described in [\[ASF\]](#) section 5.1). The value of the **cbHeader** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

bBinaryData (variable): The binary data that contains the title, description, link, and header of the media stream, in that order. The method for generating the binary data comprising the title, description, link or header (if not an ASF header) of the media stream is implementation-specific and outside the scope of this documentation. The size of the **bBinaryData** field is equal to the sum of the values of the **cbTitle**, **cbDescription**, **cbLink**, and **cbHeader** fields. The size of the **bBinaryData** field MUST be in the range of 0 to 65487 bytes. It should be noted that these requirements impose a restriction on the values that the **cbTitle**, **cbDescription**, **cbLink**, and **cbHeader** fields can assume. For example, **cbTitle** and **cbDescription** cannot both have a value of 0x8000 at the same time.

2.2.6 MSB_MSG_IND_STREAMINFO

The server MUST send the MSB_MSG_IND_STREAMINFO packet, which describes the media stream, in the following circumstances:

- Following an [MSB_MSG_RES_CONNECT](#) packet.
- When a stream switch occurs while playing a server playlist.
- Following an [MSB_MSG_IND_EOS](#) packet. For more information about sending an MSB_MSG_IND_STREAMINFO packet in this case, see section [3.1.5.3](#).

0	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	20	1	2	3	4	5	6	7	8	9	30	1
Header																															
...																															
...																															
...																															
wStreamId																cbPacketSize															
cTotalPackets																															
dwBitRate																															
msDuration																															
cbTitle																															
cbDescription																															
cbLink																															
cbHeader																															
bBinaryData (variable)																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0005.

wStreamId (2 bytes): An unsigned 16-bit integer that uniquely identifies the media stream that will be transmitted, within the current server playlist. The value of this field can be chosen arbitrarily by the server; however, it MUST be different from the wStreamId values that are used for any other streams in the same server playlist. This allows the client to distinguish [MSB_MSG_IND_PACKET](#) packets that belong to the new stream from [MSB_MSG_IND_PACKET](#) packets that belong to previous streams (if any). The value of the wStreamId field MUST be in the range 0x0000 to 0x07FF, inclusive, or in the range 0x8000 to 0x87FF, inclusive.

cbPacketSize (2 bytes): An unsigned 16-bit integer that specifies the maximum size, in bytes, of the payload in each [MSB_MSG_IND_PACKET](#) packet. The value of the **cbPacketSize** field MUST be in the range 0x0000 to 0xFFFF7, inclusive.

cTotalPackets (4 bytes): An unsigned 32-bit integer that MUST be set to the total number of [MSB_MSG_IND_PACKET](#) packets that are needed to transmit the entire media stream—if this information is known. Otherwise, the field MUST be set to 0. The value of the **cTotalPackets** field MUST be in the range 0x00000000 to 0xFFFFFFFF, inclusive.

dwBitRate (4 bytes): An unsigned 32-bit integer that represents the bit rate, measured in bits per second, of the media stream. For an ASF stream, the value of the **dwBitRate** field corresponds to the value of the Maximum Bitrate field in the ASF File Properties Object. The value of the **dwBitRate** field MUST be in the range 0x00000000 to 0xFFFFFFFF, inclusive.

msDuration (4 bytes): An unsigned 32-bit integer that MUST be set to the duration, in milliseconds, of the media stream—if this information is known. Otherwise, this value MUST be set to -1 (FFFFFFFF hexadecimal). For an ASF stream, the value of the **msDuration** field corresponds to the value of the Play Duration field in the ASF File Properties Object. The value of the **msDuration** field MUST be in the range 0x00000000 to 0xFFFFFFFF, inclusive.

cbTitle (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream title. The stream title MUST be first in the **bBinaryData** field. The value of the **cbTitle** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbDescription (4 bytes): An unsigned 32-bit integer that represents the size, in bytes, of the media stream description. The stream description MUST follow the stream title in the **bBinaryData** field. The value of the **cbDescription** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbLink (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream link (an arbitrary moniker for the connection over which the media stream is to be transmitted). The stream link MUST follow the stream description in the **bBinaryData** field. The value of the **cbLink** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

cbHeader (4 bytes): An unsigned 32-bit integer that contains the size, in bytes, of the media stream header. The stream header MUST follow the stream link in the **bBinaryData** field. If the **szChannel** field of the [MSB_MSG_REQ_CONNECT](#) packet is set to NetShow, the stream is in the Advanced Systems Format (ASF), as specified in [\[ASF\]](#) section 2, and the stream header is an ASF header. In the case of an ASF Header, the value of the **cbHeader** field is the size of the entire ASF Header Object, as described in [\[ASF\]](#) section 3.1, plus 50 bytes (which represents the fixed initial portion of the ASF Data Object, as described in [\[ASF\]](#) section 5.1). The value of the **cbHeader** field MUST be in the range 0x00000000 to 0x0000FFCF, inclusive.

bBinaryData (variable): The binary data that contains the title, description, link, and header of the media stream, in that order. The method for generating the binary data comprising the title, description, link or header (if not an ASF header) of the media stream is implementation-specific and outside the scope of this documentation. The size of the **bBinaryData** field is equal to the sum of the values of the **cbTitle**, **cbDescription**, **cbLink**, and **cbHeader** fields. The size of the **bBinaryData** field MUST be in the range of 0 to 65487 bytes. It should be noted that these requirements impose a restriction on the values that the **cbTitle**, **cbDescription**, **cbLink**, and **cbHeader** fields can assume. For example, **cbTitle** and **cbDescription** cannot both have a value of 0x8000 at the same time.

2.2.7 MSB_MSG_REQ_CONNECT

The client sends an MSB_MSG_REQ_CONNECT packet to request a media stream from the server.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Header																															
...																															
...																															
...																															
dwFlags																															
szChannel (variable)																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0007.

dwFlags (4 bytes): An unsigned 32-bit integer that represents the connection type. The value MUST be one of the following:

Value	Meaning
0x0002	The media stream is sent to multiple clients simultaneously by using IP multicasting; each client maintains an individual TCP control connection to the server.
0x0001	The media stream is sent to a single client using the current TCP connection.

szChannel (variable): This field SHOULD be set to the word NetShow, which MUST be represented as a string of Unicode characters. The terminating null character SHOULD NOT be included. The size of the string can be determined by subtracting the sizes of all other fields from the value of the **cbMessage** field in the packet header MSBMSGBASE. The size of the **szChannel** field MUST be between 0 and 65514 bytes. Because the **szChannel** field consists of a Unicode character string, the size of the field must be an even number of bytes.

2.2.8 MSB_MSG_RES_CONNECT

The server MUST send the MSB_MSG_RES_CONNECT packet in response to the [MSB_MSG_REQ_CONNECT](#) packet that is sent by the client.

0	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	20	1	2	3	4	5	6	7	8	9	30	1
Header																															
...																															
...																															
...																															
dwFlags																															
sin_family																sin_port															
sin_addr																															
sin_zero																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0008.

dwFlags (4 bytes): An unsigned 32-bit integer that specifies Advanced Systems Format (ASF) information. This field SHOULD be set to 0x00000002 if the ASF header is present in a Windows Media Station .nsc file; otherwise, this field MUST be set to 0x00000000. For information about .nsc files, see [\[MS-MSB\]](#) section 2.2.1.

Value	Meaning
0x00000000	ASF header NOT present in .nsc file
0x00000002	ASF header present in .nsc file

sin_family (2 bytes): An unsigned 16-bit integer. The **sin_family** field MUST be set to 2 if the media stream is being multicast; otherwise it SHOULD be set to 0.

sin_port (2 bytes): An unsigned 16-bit integer transmitted in big-endian byte order. If the media stream is being multicast, the **sin_port** field MUST be set to the UDP port number for

the requested channel; otherwise, it SHOULD be set to 0. The value of the **sin_port** field MUST be in the range 0x0000 to 0xFFFF, inclusive.

sin_addr (4 bytes): An unsigned 32-bit integer that is transmitted in big-endian byte order. If the media stream is being multicast, the **sin_addr** field MUST be set to a valid IPv4 multicast address for the requested channel; otherwise, it SHOULD be set to 0. The value of the **sin_addr** field MUST be in the range 0x00000000 to 0xFFFFFFFF, inclusive.

sin_zero (8 bytes): An array of 8 bytes. Each byte in the array SHOULD be set to 0 and MUST be ignored on receipt.

2.2.9 MSB_MSG_IND_EOS

The server MUST send the MSB_MSG_IND_EOS packet to indicate the end of the media stream. This packet always precedes an empty [MSB_MSG_IND_STREAMINFO](#) packet.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Header																															
...																															
...																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x0009.

2.2.10 MSB_MSG_IND_PACKET

The server transmits the media stream by using MSB_MSG_IND_PACKET packets. Each Advanced Systems Format (ASF) data packet in the media stream MUST be encapsulated in a separate MSB_MSG_IND_PACKET packet. The server MUST NOT combine multiple ASF packets in a single MSB_MSG_IND_PACKET and MUST NOT fragment an ASF packet across multiple MSB_MSG_IND_PACKET packets.

The MSB_MSG_IND_PACKET packets MUST be transmitted over the MSBD TCP connection (that is, the same TCP connection on which the server transmitted the [MSB_MSG_RES_CONNECT](#) packet, except when the server has agreed to use IP multicasting to deliver the MSB_MSG_IND_PACKET packets). When IP multicasting is used, the server MUST transmit the MSB_MSG_IND_PACKET packets to the IP multicast address/UDP port number combination indicated in the MSB_MSG_RES_CONNECT packet.

0	1	2	3	4	5	6	7	8	9	0 ¹	1	2	3	4	5	6	7	8	9	0 ²	1	2	3	4	5	6	7	8	9	0 ³	1
Header																															
...																															
...																															
...																															
dwPacketId																															
wStreamId																wPacketSize															
bPayload (variable)																															
...																															

Header (16 bytes): An [MSBMSGBASE](#) packet that defines the packet header. The **wMessageId** field MUST be set to 0x000A.

dwPacketId (4 bytes): An unsigned 32-bit integer that identifies the MSB_MSG_IND_PACKET packet. This value SHOULD start with 0 for the first MSB_MSG_IND_PACKET packet that is transmitted; alternatively, the starting value MAY be chosen randomly. The value of the **dwPacketId** field MUST be incremented for each new MSB_MSG_IND_PACKET packet that is transmitted. The value of the **dwPacketId** field MUST fall within the range 0x00000000 to 0xFFFFFFFF, inclusive.

wStreamId (2 bytes): An unsigned 16-bit integer that identifies the content. This value MUST be the same as the **wStreamId** field in the [MSB_MSG_IND_STREAMINFO](#) packet. The value of the **wStreamId** field MUST be in the range 0x0000 to 0x07FF, inclusive, or in the range 0x8000 to 0x87FF, inclusive.

wPacketSize (2 bytes): An unsigned 16-bit integer that contains the size, in bytes, of the **bPayload** field plus the size of the **wStreamId**, **dwPacketId**, and **wPacketSize** fields. The **wPacketSize** field MUST be set to a value in the range 0x0008 to 0xFFEF, inclusive.

bPayload (variable): One ASF packet. If the ASF packet contains a nonzero **Padding Data** field, this field MUST be included in **bPayload**. Details on the **Padding Data** field are as specified in [\[ASF\]](#) section 5.2.4. Error correction, as specified in [MS-MSB] section 2.2.2, MAY be used, in which case some of the ASF packets are **parity packets**, as specified in [MS-MSB] section 2.2.2. If the **bPayload** field contains a parity packet, the **dwPacketId** field MUST be identical to that of the previously transmitted MSB_MSG_IND_PACKET.

3 Protocol Details

The following sections specify details of the MSBD Protocol, including abstract data models and message processing rules for both server and client.

3.1 Server Details

This section specifies details for server implementations of the MSBD Protocol. The state machine for MSBD on a server is depicted in the following diagram:

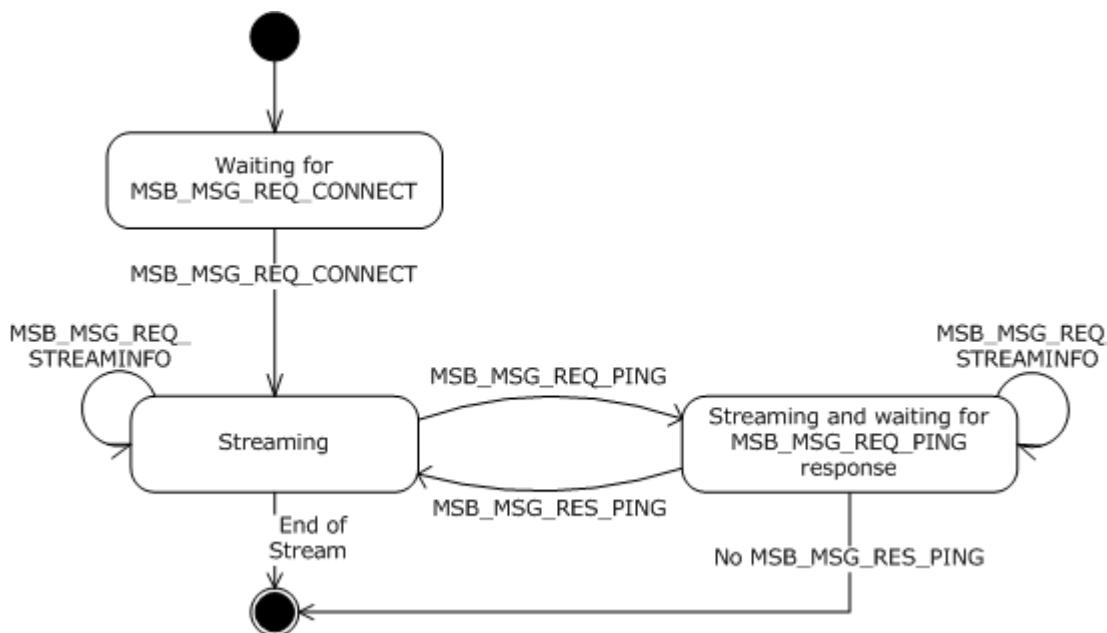


Figure 1: State machine for MSBD on a server

3.1.1 Abstract Data Model

Not applicable for this protocol specification.

3.1.2 Timers

An implementation of the MSBD Protocol on a server can use a timer to schedule the transmission of [MSB_MSG_REQ_PING](#) packets.

3.1.3 Initialization

If a timer is used to schedule the transmission of [MSB_MSG_REQ_PING](#) packets, then that timer should initially not be running.

The server initializes by listening for incoming TCP connections on the TCP port reserved by the server for communication using the MSBD Protocol. The server **MUST** then wait for an [MSB_MSG_REQ_CONNECT](#) packet to be received on a new TCP connection.

How to process the MSB_MSG_REQ_CONNECT packet is described in section [3.1.5.1](#).

3.1.4 Higher-Layer Triggered Events

Not applicable for this protocol specification.

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Receiving an MSB_MSG_REQ_CONNECT Packet

If the value of the **dwFlags** field in the [MSB_MSG_REQ_CONNECT](#) packet is 0x0002 and the server does not support delivery of [MSB_MSG_IND_PACKET](#) packets over UDP, then the server MUST reject the connection request. In that case, the server MUST respond with an [MSB_MSG_RES_CONNECT](#) packet where the **hr** field is set to an [HRESULT](#) failure code. The value of the **hr** field SHOULD then be set either to 0xC00D001A or to 0x80070057, but the server MAY set the **hr** field to a different value as long as it corresponds to an **HRESULT** failure code. For more information about **HRESULT** codes, see [\[MS-ERREF\]](#).

If the connection is accepted, the server MUST send an [MSB_MSG_RES_CONNECT](#) packet with the **hr** field set to 0x00000000 and MUST follow it with an [MSB_MSG_IND_STREAMINFO](#) packet. If the connection is rejected, the server MUST close the TCP connection after having sent the [MSB_MSG_RES_CONNECT](#) packet.

If the connection is accepted, then the server transmits the stream as a sequence of [MSB_MSG_IND_PACKET](#) packets.

3.1.5.2 Receiving an MSB_MSG_REQ_STREAMINFO Packet

The server MUST send an [MSB_MSG_RES_STREAMINFO](#) packet.

3.1.5.3 Reaching the End of the Stream

When the server transmits the last [MSB_MSG_IND_PACKET](#) packet for a stream, the server MUST send an [MSB_MSG_IND_EOS](#) packet that is followed by an [MSB_MSG_IND_STREAMINFO](#) packet. The [MSB_MSG_IND_STREAMINFO](#) packet MUST contain information about the next stream to be transmitted. If there are no additional streams to transmit, the [MSB_MSG_IND_STREAMINFO](#) packet MUST be "empty". For an empty [MSB_MSG_IND_STREAMINFO](#) packet, the size of the **bBinaryData** field MUST be 0 bytes, and the **hr** field SHOULD be set to 0xC00D0033. The server SHOULD set all the remaining fields in the empty [MSB_MSG_IND_STREAMINFO](#) packet to 0. [<4>](#)

3.1.6 Timer Events

If the server uses a timer to schedule the transmission of the [MSB_MSG_REQ_PING](#) packets, when that timer expires, the server SHOULD send an [MSB_MSG_REQ_PING](#) packet. If after sending an [MSB_MSG_REQ_PING](#) packet, the server does not receive an [MSB_MSG_RES_PING](#) packet within 2 minutes, the server SHOULD end the session by closing the TCP connection to the client.

3.1.7 Other Local Events

Not applicable for this protocol specification.

3.2 Client Details

This section specifies details for client implementations of the MSBD Protocol. The state machine for MSBD on a client is depicted in the following diagram:

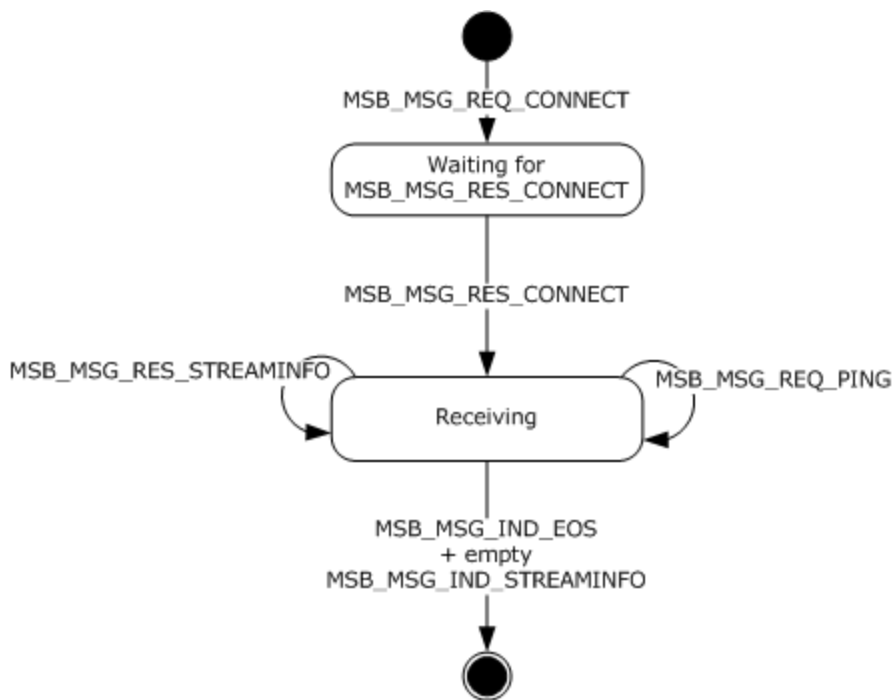


Figure 2: State machine for MSBD on a client

3.2.1 Abstract Data Model

Not applicable for this protocol specification.

3.2.2 Timers

Not applicable for this protocol specification.

3.2.3 Initialization

The client initializes an MSBD streaming session by establishing a TCP connection to the TCP port that the server reserves for communication by using the MSBD Protocol. The client and server **MUST** agree on the TCP port number that is used for the MSBD Protocol through some mechanism not addressed in the MSBD Protocol, because the port number **MUST** be known prior to the transmission of the first MSBD packet.

After the TCP connection is established, the client **MUST** send an [MSB MSG REQ CONNECT](#) packet.

3.2.4 Higher-Layer Triggered Events

Not applicable for this protocol specification.

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 Receiving an MSB_MSG_REQ_PING Packet

The client **MUST** send an [MSB MSG RES PING](#) packet.

3.2.5.2 Receiving an MSB_MSG_IND_STREAMINFO Packet

If the client receives an "empty" [MSB_MSG_IND_STREAMINFO](#) packet (as specified in section [3.1.5.3](#)), the portion of the packet that does not include the **Header** field MUST be ignored.

3.2.6 Timer Events

Not applicable for this protocol specification.

3.2.7 Other Local Events

Not applicable for this protocol specification.

4 Protocol Example

The following sections describe several operations as used in common scenarios to illustrate the function of the MSBD Protocol.

4.1 General MSBD Sequence

The following diagram shows a typical communication sequence between the client and server.

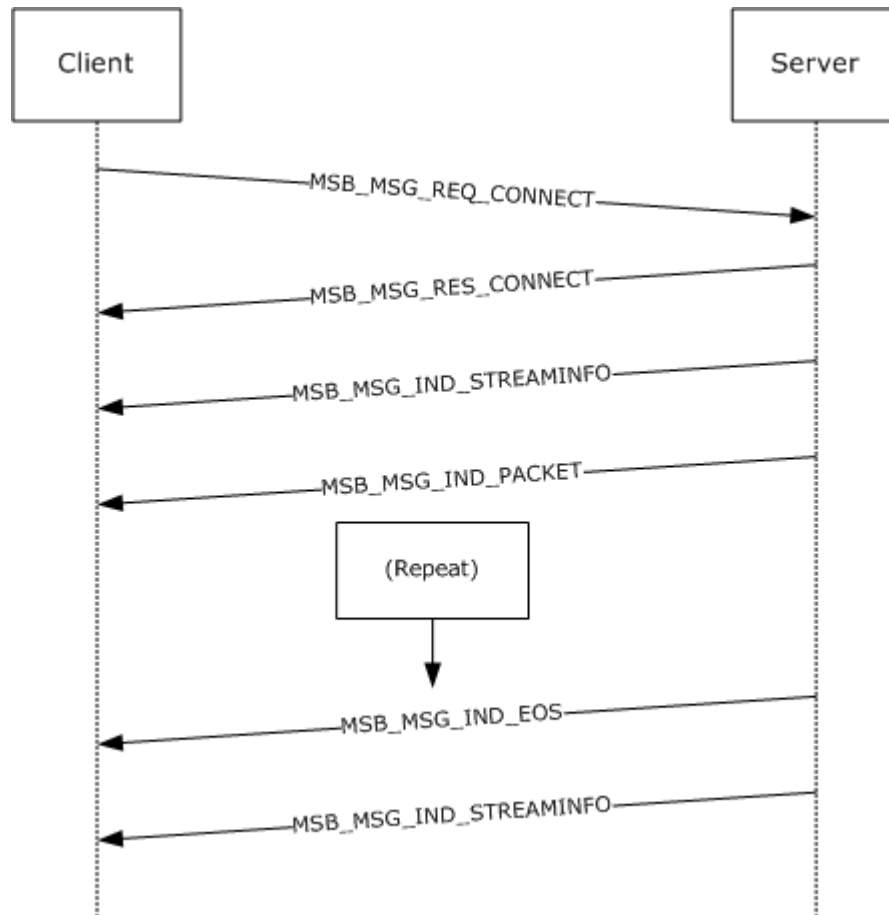


Figure 3: Client/server communication sequence

1. The client opens a TCP connection to the server and sends an [MSB_MSG_REQ_CONNECT](#) packet.
2. The server responds with an [MSB_MSG_RES_CONNECT](#) packet followed by an [MSB_MSG_IND_STREAMINFO](#) packet that describes the media stream.
3. The server sends one or more [MSB_MSG_IND_PACKET](#) packets, each of which contains one ASF packet. The packets are sent either over the TCP connection or by using UDP to an IP multicast group.
4. When the stream ends, the server sends an [MSB_MSG_IND_EOS](#) packet that is followed by an empty [MSB_MSG_IND_STREAMINFO](#) packet.

During the previous message exchange, the server periodically pings the client by using an [MSB_MSG_REQ_PING](#) packet. If the client does not respond to the MSB_MSG_REQ_PING packet with an [MSB_MSG_RES_PING](#) packet, the server closes the TCP connection. In other cases, the client is responsible for ending the session by closing the TCP connection.

4.2 Server-Side Playlist Streaming by Using MSBD

The following diagram shows a typical communication sequence between a client and server when streaming content from a server-side playlist.

Note: When using the MSBD Protocol, the client does not have the capability to seek or skip to a new entry in a server-side playlist.

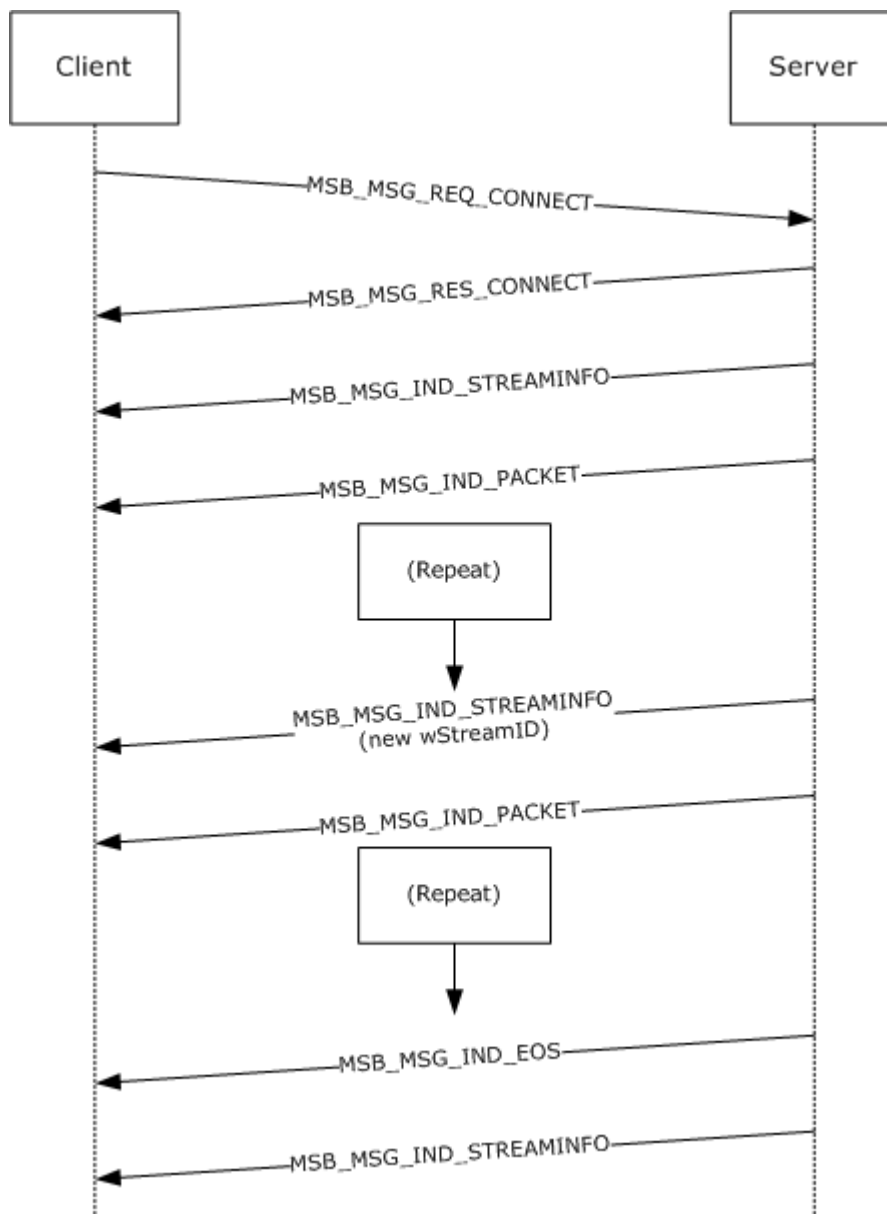


Figure 4: Client/server communication sequence when streaming from a server-side playlist

1. The client opens a TCP connection to the server and sends an [MSB_MSG_REQ_CONNECT](#) packet.
2. The server responds with an [MSB_MSG_RES_CONNECT](#) packet followed by an [MSB_MSG_IND_STREAMINFO](#) packet that describes the media stream.
3. The server sends one or more [MSB_MSG_IND_PACKET](#) packets, each of which contains one ASF packet. The packets are sent either over the TCP connection or by using UDP to an IP multicast group.
4. When the entry changes in the server-side playlist, the server sends a [MSB_MSG_IND_STREAMINFO](#) packet with a new **wStreamId** value. For more information, see section [2.2.6](#).
5. The server sends one or more [MSB_MSG_IND_PACKET](#) packets for the new playlist entry, each of which contains one ASF packet. The packets are sent either over the TCP connection or by using UDP to an IP multicast group.
6. Steps 4 and 5 are repeated for all entries in the server-side playlist.
7. When the streams end, the server sends an [MSB_MSG_IND_EOS](#) packet that is followed by an empty [MSB_MSG_IND_STREAMINFO](#) packet.

During the above message exchange, the server periodically pings the client by using an [MSB_MSG_REQ_PING](#) packet. If the client does not respond to the [MSB_MSG_REQ_PING](#) packet with an [MSB_MSG_RES_PING](#) packet, the server closes the TCP connection. In other cases, the client is responsible for ending the session by closing the TCP connection.

5 Security

The following sections specify security considerations for implementers of the MSBD Protocol.

5.1 Security Considerations for Implementers

For any packet that contains fields that specify other field lengths, implementers SHOULD ensure that the length values do not exceed the size of the packet itself. For example, [MSB_MSG_IND_STREAMINFO](#) is one packet that has multiple length fields.

Implementers SHOULD not assume that the ASF data in the MSB_MSG_IND_STREAMINFO and [MSB_MSG_IND_PACKET](#) packets can be trusted. Use caution when parsing variable-length fields, ensuring that length information, if any, does not cause the size of buffers to be exceeded.

5.2 Index of Security Parameters

The MSBD Protocol has no applicable security parameters.

6 Appendix A: Windows Behavior

The information in this specification is applicable to the following versions of Windows:

- Windows NT
- Windows 2000
- Windows XP
- Windows Server 2003

Exceptions, if any, are noted below. Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies Windows behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that Windows does not follow the prescription.

[<1> Section 1.3:](#) The MSBD Protocol is supported only in Windows Media Player 6.4.

[<2> Section 1.4:](#) IP multicast is supported only by Windows Media Services implementations in Windows 2000 Server and Windows NT 4.0.

[<3> Section 1.6:](#) The server role is supported only on Windows 2000 Server and Windows NT 4.0.

[<4> Section 3.1.5.3:](#) Windows Media Services on Windows NT 4.0, Windows 2000 Server and Windows Server 2003 does not assign values to the **wStreamId**, **cbPacketSize**, **cTotalPackets**, **dwBitRate**, **msDuration**, **cbTitle**, **cbDescription**, **cbLink**, or **cbHeader** fields.

7 Index

A

Abstract data model
[client](#)
[server](#)
[Applicability statement](#)

C

[Capability negotiation](#)
Client
[abstract data model](#)
[higher-layer triggered events](#)
[initialization](#)
[local events](#)
[message processing](#)
[sequencing rules](#)
[timer events](#)
[timers](#)

D

Data model – abstract
[client](#)
[server](#)

E

[End of stream](#)
Examples ([section 4](#), [section 4.1](#), [section 4.2](#))

F

[Fields – vendor-extensible](#)

G

[Glossary](#)

H

Higher-layer triggered events
[client](#)
[server](#)

I

[Implementers – security considerations](#)
[Informative references](#)
Initialization
[client](#)
[server](#)
[Introduction](#)

L

Local events
[client](#)

[server](#)

M

Message processing
[client](#)
[server](#)
Messages
[syntax](#)
[transport](#)
[MSB MSG IND EOS packet](#)
[MSB MSG IND PACKET packet](#)
[MSB MSG IND STREAMINFO](#)
[MSB MSG IND STREAMINFO packet](#)
[MSB MSG REQ CONNECT](#)
[MSB MSG REQ CONNECT packet](#)
[MSB MSG REQ PING](#)
[MSB MSG REQ PING packet](#)
[MSB MSG REQ STREAMINFO](#)
[MSB MSG REQ STREAMINFO packet](#)
[MSB MSG RES CONNECT packet](#)
[MSB MSG RES PING packet](#)
[MSB MSG RES STREAMINFO packet](#)
[MSBMSGBASE packet](#)

N

[Normative references](#)

O

[Overview \(synopsis\)](#)

P

[Parameters – security](#)
[Preconditions](#)
[Prerequisites](#)

R

References
[informative](#)
[overview](#)
[References – normative](#)
[Relationship to other protocols](#)

S

[Security](#)
Sequencing rules
[client](#)
[server](#)
Server
[abstract data model](#)
[higher-layer triggered events](#)
[initialization](#)
[local events](#)

[message processing](#)
[sequencing rules](#)
[timer events](#)
[timers](#)
[Standards assignments](#)
[Syntax – message](#)

T

Timer events

[client](#)
[server](#)

Timers

[client](#)
[server](#)

[Transport – message](#)

Triggered events – higher layer

[client](#)
[server](#)

V

[Vendor-extensible fields](#)

[Versioning](#)

W

[Windows behavior](#)